

ALDAS9821 EXTERNAL

STANDARD MAGLOCK SS CASE MONITORED 12/24V

ELECTRIC LOCKING

External Magnet

- Operating voltage 12~24Vdc
(Selectable)
- Stainless Steel housing
- Holding force up to 1200lbs *(545Kg)*
- Weather resistant IP67
- Sealed electronics



57-60 OXFORD STREET SWANSEA SA1 3JD




T 01792 655680
F 01792 462243
E sales@lock-tech.co.uk
W www.lock-tech.co.uk



WEATHER
RESISTANT
- IP 67 -



STAINLESS
STEEL

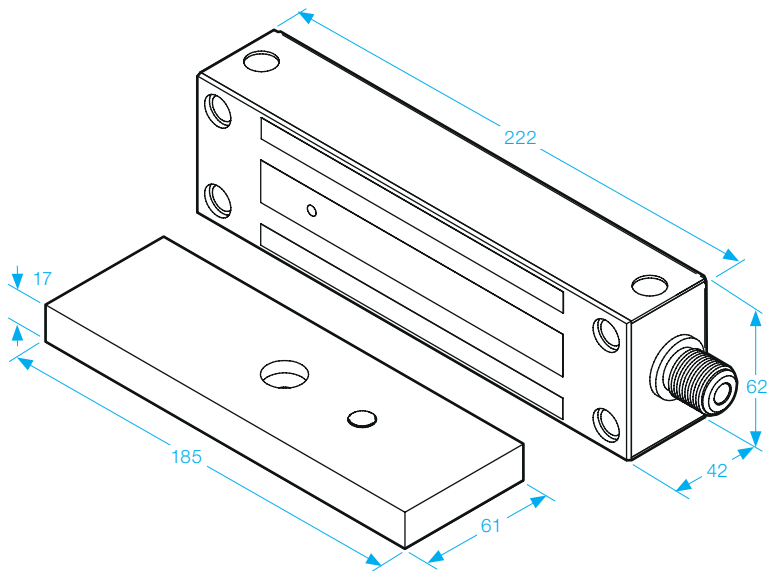

CAUTION
Before applying power
set wiring correctly.

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc *(at temperature 20°C)*.
- Operating temperature: -10~55°C *(14 to 131°F)*.
- Lock's surface temperature: Current temperature $\pm 20\%$ *(when power is on)*.
- Humidity: 0~95% non-condensing.
- Weight: 3.7kg *(approx)*.
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. *(N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc)*.