


Acoustic Seals

Concealex Facefix Dropseal

REF: EXIDDSF/0830/A & EXIDDSF/0930/A

Application	All types of swing doors
Maximum drop	14mm
Trimming lengths	Up to 150mm on the opposite side to the plunger
Fixing	Surface mounted screw fix with aluminium clip on cover with nylon cap
Adjustment	Plunger adjustable with a 3mm Allen Key
Self-levelling	Yes
Seal	Self-extinguishing co-extruded thermoplastic
Fire Tested	for 30 & 60 minutes to BS 476: Part 22
Smoke Tested	to BS EN 1634-3: 2001
Acoustic Tested	up to 43DB to BS EN ISO 10140-2:2010
Available in	SAA
In sizes	730mm, 830mm, 930mm and 1030mm

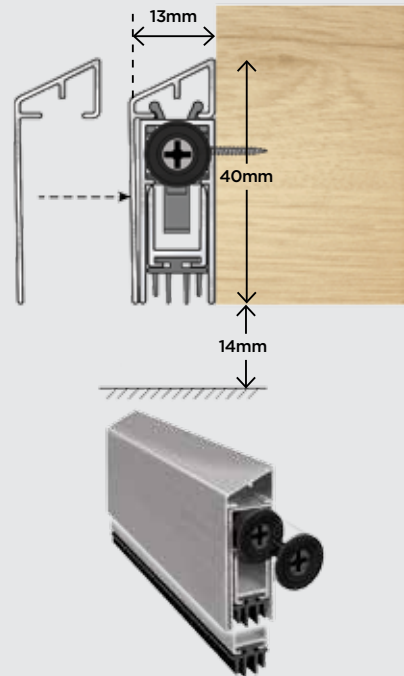

Concealex A8100 Superior

REF: EXIDDSI/0926/A

Application	Timber doors and security doors
Maximum drop	17mm
Trimming lengths	Up to 150mm on the opposite side to the plunger (length 330mm can be shortened 50mm, length 426mm can be shortened 135mm)
Fixing	With stainless steel bracket
Adjustment	Plunger with adjustable spring
Self-levelling	Yes
Seal	Sound insulating seal in self-extinguishing TPE
Fire Tested	For 30 & 60 minutes to BS EN 1634-1: 2014
Smoke Tested	to BS EN 1634-3: 2004
Acoustic Tested	up to 44DB to BS EN ISO 10140-2: 2010
In sizes	330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 914mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm

