
GK310MLS-24Vdc

Monitored Electric Release


- Operating voltage 24Vdc
- Fail-Safe/Fail-Secure *(Selectable)*
- Supplied with long plate
- ANSI style electric release



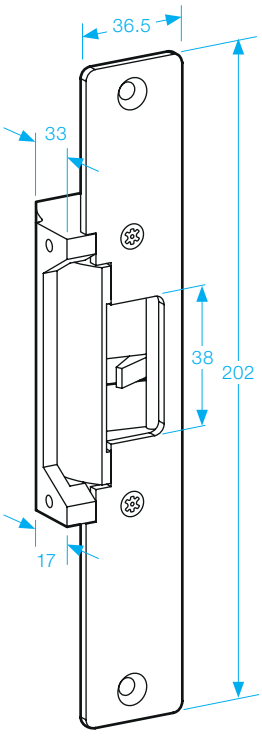

FLEXIBLE SOLUTIONS

The GK310MLS electric strike can easily change between Fail-Safe and Fail-Secure modes. This unique design enables distributors to reduce inventory and still meet varying needs and requirements of end users.

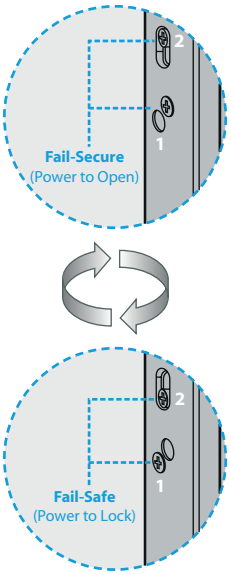

SPECIFICATION

- Voltage tolerance: ±15%.
- Current draw: 0.15A at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~45°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Sensor switch monitored output indicates lockset locked or unlocked status *(SPDT rated 2A at 125Vdc).*
- Humidity: 0~95% non-condensing.
- Horizontal or vertical installation.
- Tested to 1,000,000 cycles
- 2000lbs jaw strength pull testing.