

FEB SUPERSERIES

SEMMA4

Classification EN1125 (3-7-5-1-1-3-2-2-A)



SEMMA-4 is the latest development of the Strand SuperSeries 95 range. It incorporates all the features of the SuperSeries 95 but with the addition of the unique red/black indicator which shows at a glance whether the door is operable from the outside (the Red indicator is a warning that the door is unlocked and will permit free access from outside).

Operation

The outside locking status can only be altered by use of the key from either inside or outside when a double europrofile cylinder is incorporated. If a single sided europrofile cylinder is used, the outside locking can be reset only from inside. When the push bar or push pad is operated, the outside locking status remains unaltered allowing emergency exit at all times.

Cylinders

All Semma-4 devices are supplied complete with lever handle and double europrofile cylinder suitable for door thicknesses of up to 53mm. Longer cylinders are available for doors up to 63mm thick and extra long for doors up to 80mm thick. Please specify type required and door thickness. Single cylinders are also available for internal reset only (Ref. ES117/9).



EN1125

Panic bolts and latches from the Super Series Semma-4 range have been successfully tested and certified to EN1125, including the additional requirements for use on fire doors. Copies of certificate are available on request.


Note: Vertical rod covers EX9538 are available for pullman latch versions see page 16.



Optional St. Steel or Brass Handles

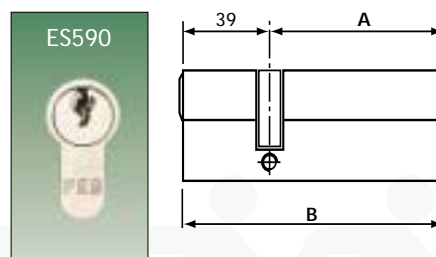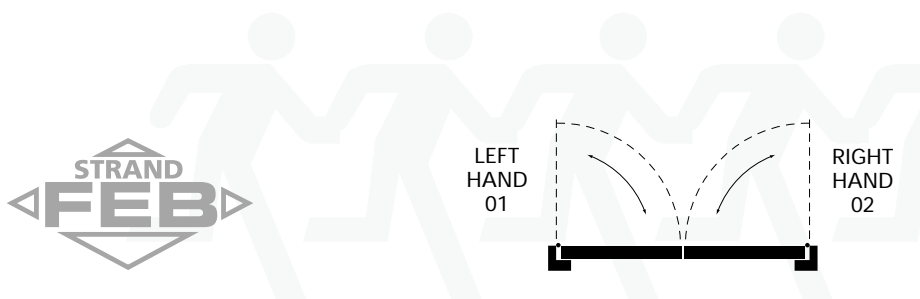

| | Dimensions | |
|--------|------------|-----|
| | A | B |
| ES590O | 65 | 104 |
| ES590M | 75 | 114 |
| ES590L | 91 | 130 |



ES117/9

FEB SUPERSERIES SEMMA4

PANIC BOLTS AND LATCHES ES450, 455, 457

Classification EN1125 (3-7-5-1-1-3-2-2-A)



CE ES450-01-81



ES457-01-44 CE

General Description - See Page 9.

Specifications and Dimensions

As Strand-Feb SuperSeries 95 detailed on pages 4-7 of catalogue.

Semma-4 devices are usually fitted on single leaf outward opening doors. On pairs of doors a Semma-4 would usually be used on the active (first opening) leaf with a standard Super Series 95 panic bolt on the secondary leaf.

Size of doors

To suit doors up to 2700mm high x 1100mm wide. Extra long crossarms and vertical rods are available for doors exceeding these dimensions.

Information

Required when ordering:

- 1) Hand of door
- 2) Thickness of door
- 3) Finish
- 4) Whether door is constructed from timber, aluminium, steel or PVCu.



CE ES455-02-25

Application


Semma-4 may be used on timber, PVCu, steel or aluminium single doors (note: please specify material so that correct strikers can be provided), or may be used on double doors in conjunction with Strand-Feb SuperSeries 95 panic bolts.

Fixing/Packaging


Individually packed in a strong purpose made cardboard carton together with all fixings and full instructions.

FINISHES

- EPS-20
- EPB-01
- EPW-25
- BGN-81
- SGN-82
- WGN-85
- BP-43
- SSP-44
- PSSP-55
- Other Colours-00

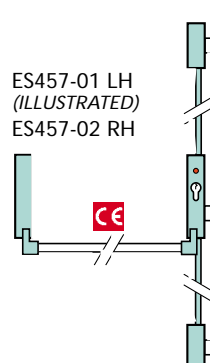


ES457-01 LH (ILLUSTRATED)
ES457-02 RH

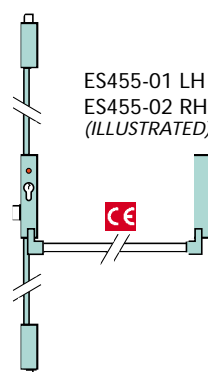

ES455-01 LH (ILLUSTRATED)
ES455-02 RH (ILLUSTRATED)

Note: vertical rod covers EX9538 are available for panic bolts and three point latches (see page 16)



ES450-01 LH (ILLUSTRATED)
ES450-02 RH