

Door / Window Stay Installation

- Steplessly adjustable
- All components are rustproof
- Swedish manufacture
- Electro-galvanized steel rod, anodized aluminium cylinder, tough polyamide plastic mounting

Size -
model 1124: 315-515mm

Not child proof

Assembly

The balcony door holder must be positioned on the upper part of the frame and provide an opening angle of approximately 90° as per the sketch below. Should a narrower opening angle be desired, open the door to the desired maximum position, draw the rod out to the intended stop position, and mark the fastening holes.

B - Outward-opening door

1. Use the fastening for outward-opening door.
2. Assemble the door holder with the door closed. Prepare holes with an awl.

3. Adjust the friction of the door holder with the positioning screw.
4. If the door is to be opened completely, turn the pin to loosen, and withdraw from the fastening.

B - Inward-opening door

1. Use the fastening for inward-opening door.
2. Assemble the door holder with the door closed. Prepare holes with an awl.
3. Adjust the friction of the door holder with the positioning screw.
4. If the door is to be opened completely, turn the pin to loosen, and withdraw from the fastening.

The 60 degree opening version (1125) is fitted similarly and is primarily intended for windows. It is normally fitted to the bottom of the window but can be fitted at the top.

This has an SAA rod.

Size -
model 1125: 200-390mm

Not child proof

HI-SPECIFICATION

LOCK-TECH®

ARCHITECTURAL HARDWARE


57-60 OXFORD STREET SWANSEA SA1 3JD

T 01792 655680


F 01792 462243

E sales@lock-tech.co.uk

W www.lock-tech.co.uk

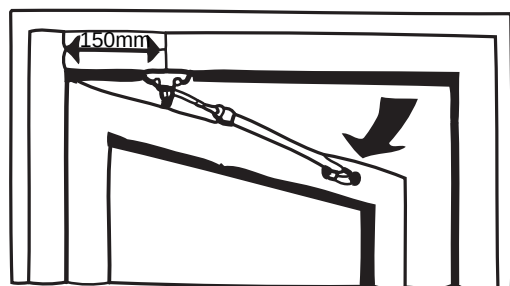


Outward-opening door

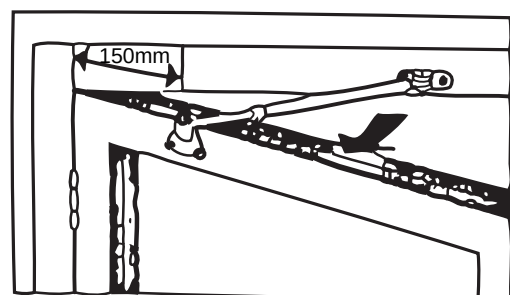


Inward-opening door

A Open Out Attachment

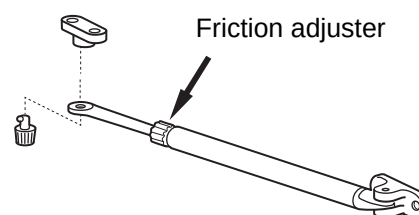

B Open In Attachment

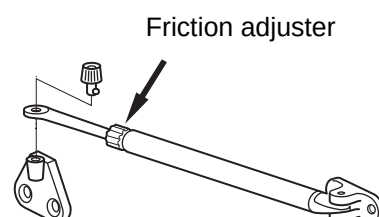


Restricted Opening Window Stay Installation

C - Assembly instructions for window


For use as a window-holder, positioning may be made below or above the frame fastener as in the picture.

SAA rod

Size - 160-210mm



Outward-opening window

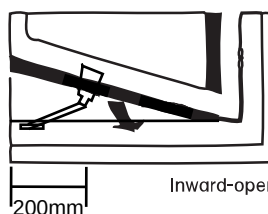

Inward-opening window

This restricted opening version, 1126 should be fitted so that the window does not open more than 100mm - this can be accomplished by fitting the stay closer to the opening edge of the window. The attachment plate remains at 200mm.

If used to provide a level of child safety, it should be fitted at a height of at least 1800mm